

## PMC.10 DISCREET SAMPLING POINT for CAPILLARY 10 mm




MODELS:

**PMC.10** ABS White

SIZE:

As seen in the picture, its reduced size makes it suitable to be unnoticed in some environments and decorations.

Also, if a small point is required, due to dimensions, such as inside control panels where installation of a point is difficult, or just as an aerial point in the same capillary pipe.

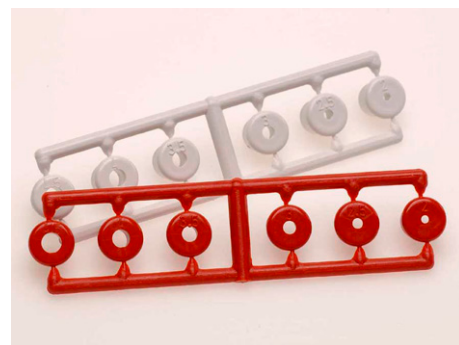

MATERIAL:

ABS (Acrylonitrile-Butadiene-Styrene)

Robust polymere with physic features for optimum strength to expansion and impact, hard resistance, high longevity, high resisting to temperatures bellow 0°.

ABS is a Halogen-free thermoplastic.

Maximum temperatures of use. -35° to 60°

DISCREET SAMPLING POINT	SECTION	ASD SYSTEMS
	DATE	MARCH 2015
for CAPILLARY 10 mm	REVISED	J. VALLS
	REF.	<b>PMC.10</b>