


## PM.TU SAMPLING POINT for Pipe

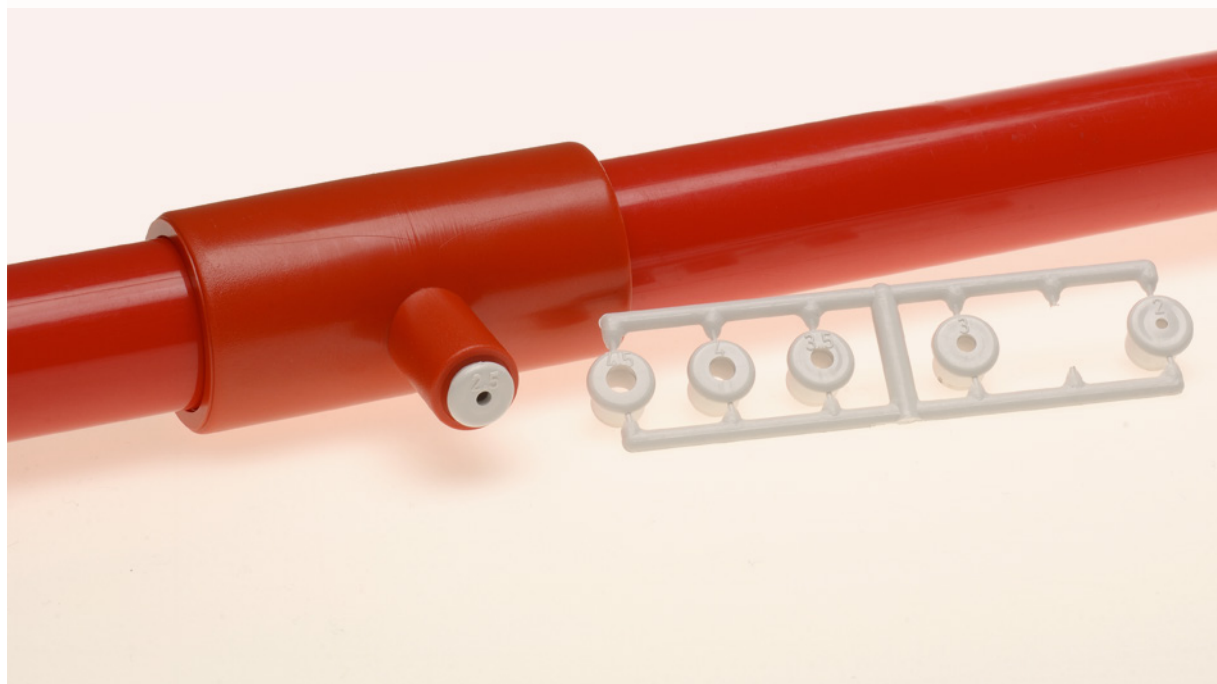

### MODELS:

<b>PM.TU</b>	ABS Red
<b>PM.TU B</b>	ABS White
<b>PM.TU RF</b>	ABS Fireproof Red

### DESCRIPTION:

Sampling point for Pipe with interchangeable calibrators, it is a more professional alternative to the typical adhesive labels which, with time and difference of temperature, can fall down or vanish. As an added value, the Sampling point for pipe has the advantage that in case of extension of the installation it can be easily replaced by one of different measure, and also easy to spot at first glance.

- **Includes:** 6 interchangeable calibrated points of 2 / 2.5 / 3 / 3.5 / 4 / 4.5 mm.

### MATERIAL:

ABS (Acrylonitrile-Butadiene-Styrene)  
Robust polymere with physic features for optimum strength to expansion and impact, hard resistance, high longevity, high resisting to temperatures bellow 0°.

ABS is a Halogen-free thermoplastic.

Maximum temperatures of use. -35° to 60°

SAMPLING POINT	SECTION	ASD SYSTEMS
	DATE	MARCH 2015
for Pipe	REVISED	J. VALLS
	REF.	<b>PM.TU</b>