

# DW1400

## BRASS RECESSED MAGNETIC CONTACT



### OVERALL

The recessed magnetic contacts of the DW1400 series are designed for recessing into wooden door or window frames


**Certificate:** **EN 50131-2-6 Grade 2 Class III**

**Models:** **DW1400/6:** the same characteristics with 6 meters of wire  
**DW1400/10:** the same characteristics with 10 meters of wire



### TECHNICAL SPECIFICATIONS

Contact type	-----	NA
Switching Voltage	-----	Max. 100 V cc
Switching Current	-----	Max 500 mA
Nominal Supply	-----	Max 30 V cc
Contact Current	-----	Max 200 mA
Contact Resistance	-----	250 mΩ
Cable hose 4 x 0.18	-----	2 meters
Reed Wire Colour	-----	Red / White
Measures (mm)	-----	Ø 8 x 33
Material	-----	Brass
Colour	-----	Golden
Magnet Type	-----	AlNiCo 5 (6 x 30)
Temperature Range	-----	-30°C to +70°C
Protection category	-----	Class III

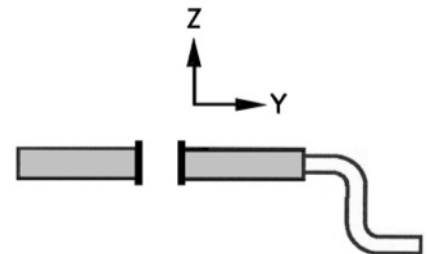


#### OPERATING RANGE $\pm 5\%$

- Upon Non-Ferromagnetic material
- Y opening 10 mm - closing 6 mm
- Z opening 11 mm - closing 6 mm

### CONNECTION TO JUNCTION BOX CCM (NOT INCLUDED)

- Conexión con 2 hilos serie + 2 TAMPER

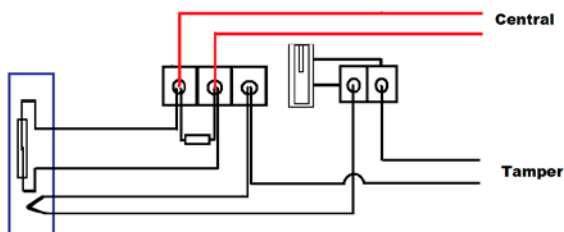

- Conexión con 2 hilos en serie con TAMPER

